


FILTER LIFE 0-15 PSID, MAXIMUM DIFFERENTIAL 25PSID
#2 FLOW RANGE 1-150 GPM, MAXIMUM FLOW RATE 180 GPM
#1 FLOW RANGE 1-75 GPM, MAXIMUM FLOW RATE 90 GPM

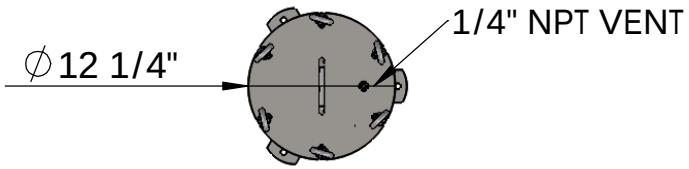


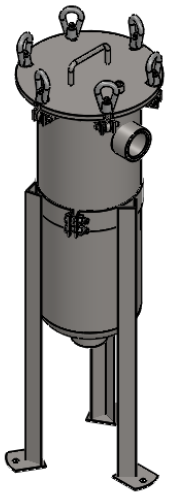

106720
SRVB-B2-2V-SO/BO
#2SIZE(7X30)

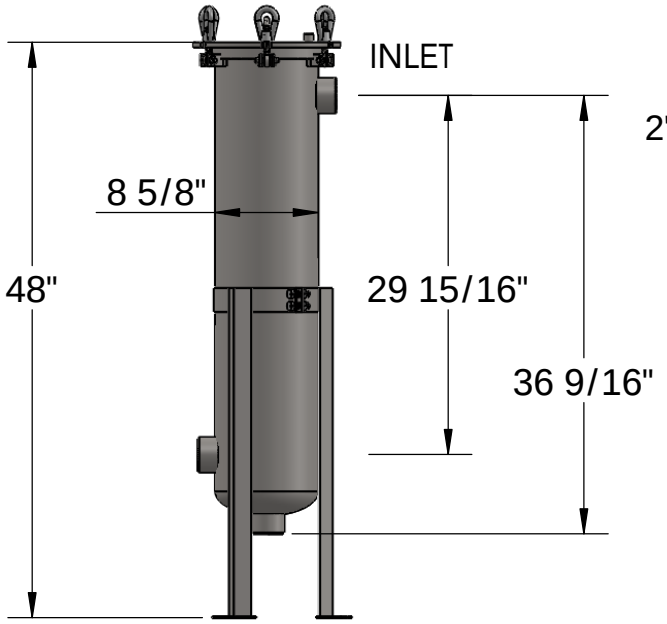

106712
SRVB-B1-2V-SO/BO
#1SIZE(7X15)

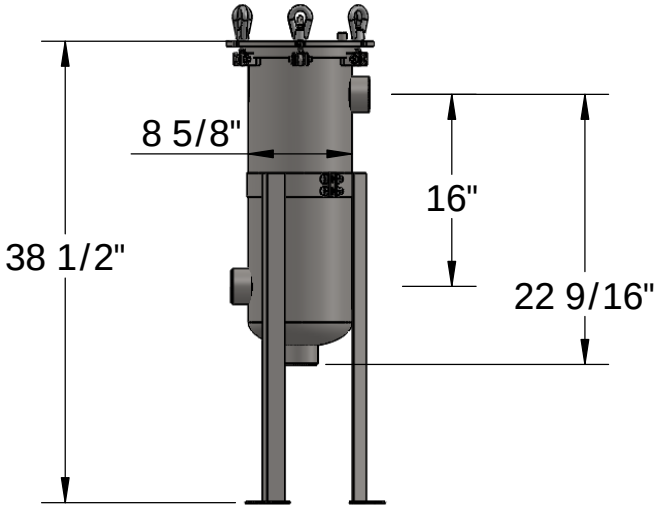

STANDARD EQUIPMENT:
-1/8" PERFORATED BASKET
-SWINGBOLT COVER
- SS TRIPOD STAND
-VITON ORING COVER SEAL
-VITON ORING BASKET SEAL
-MAWP 150 PSI @ 200F

Prod Order: -
Customer: -
Cust. P.O.: -
Cust. Tag: -
Est.Weight 80 Lbs. Full XX Lbs.

M.A.W.P. 150 P.S.I at 200 F
M.D.M.T. -20 F at 150 P.S.I
Hydrostatic Test at 195 P.S.I
MFG. Serial# TBD

SHIPPING WEIGHT 80LBS #2, 65LBS #1
15"X15"X48"

THIS REPRODUCTION IS A PROPRIETARY DESIGN AND CONFIDENTIAL INFORMATION OF UF STRAINRITE INC. AND IS LOANED SUBJECT TO THE CONDITIONS THAT: (1) IT SHALL BE USED OR CAUSED TO BE USED FOR RECORD AND REFERENCE PURPOSES; (2) IT SHALL NOT BE USED OR CAUSED TO BE USED FOR PROCUREMENT IN ANY WAY PREJUDICIAL TO UF STRAINRITE INC. INTERESTS; (3) IT SHALL NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART; AND (4) IT SHALL NOT BE DISCLOSED AS GENERAL OR SPECIFIC INFORMATION WITHOUT EXPRESSED CONSENT IN WRITING SIGNED BY AN AUTHORIZED REPRESENTATIVE OF UF STRAINRITE INC

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES:
ANGLES ± 10° FRACTION: ± 1/8
.XXX=±XX .XX= ±0.0625

MATERIAL 304

Drawn By: DCB
Date: 11/25/2019
WPS:
Drawing: REF.

SRVB-REFERENCE

STRAINRITE INC
65 First Flight Drive
Auburn Maine
(207) 777-3100

1:16 | REV 0 | SHEET 1 OF 1 | ANSI A