
REVISIONS			
LTR	DESCRIPTION	DATE	APPROVAL
0	new	xx	xx

SANITARY CARTRIDGE VESSEL
FILTER CARTRIDGE LIFE 0-20 PSID
MAXIMUM DIFFERENTIAL PRESSURE 25 PSID
FLOW RANGE 10" CTK 1-7 GPM , MAXIMUM FLOW RATE 10 GPM WATER
FLOW RANGE 20" CTK 1-14 GPM , MAXIMUM FLOW RATE 20 GPM WATER
FLOW RANGE 30" CTK 1-20 GPM , MAXIMUM FLOW RATE 25 GPM WATER
HOLDS (1) 226 STYLE CARTRIDGE (C6,C7)
DESIGN PRESSURE 100 PSI @ 200F
NON-CODE MILD SERVICE
SILICONE GASKET
32Ra POLISH INSIDE AND OUT
(PSV) PRESSURE SAFETY VALVE NOT SUPPLIED

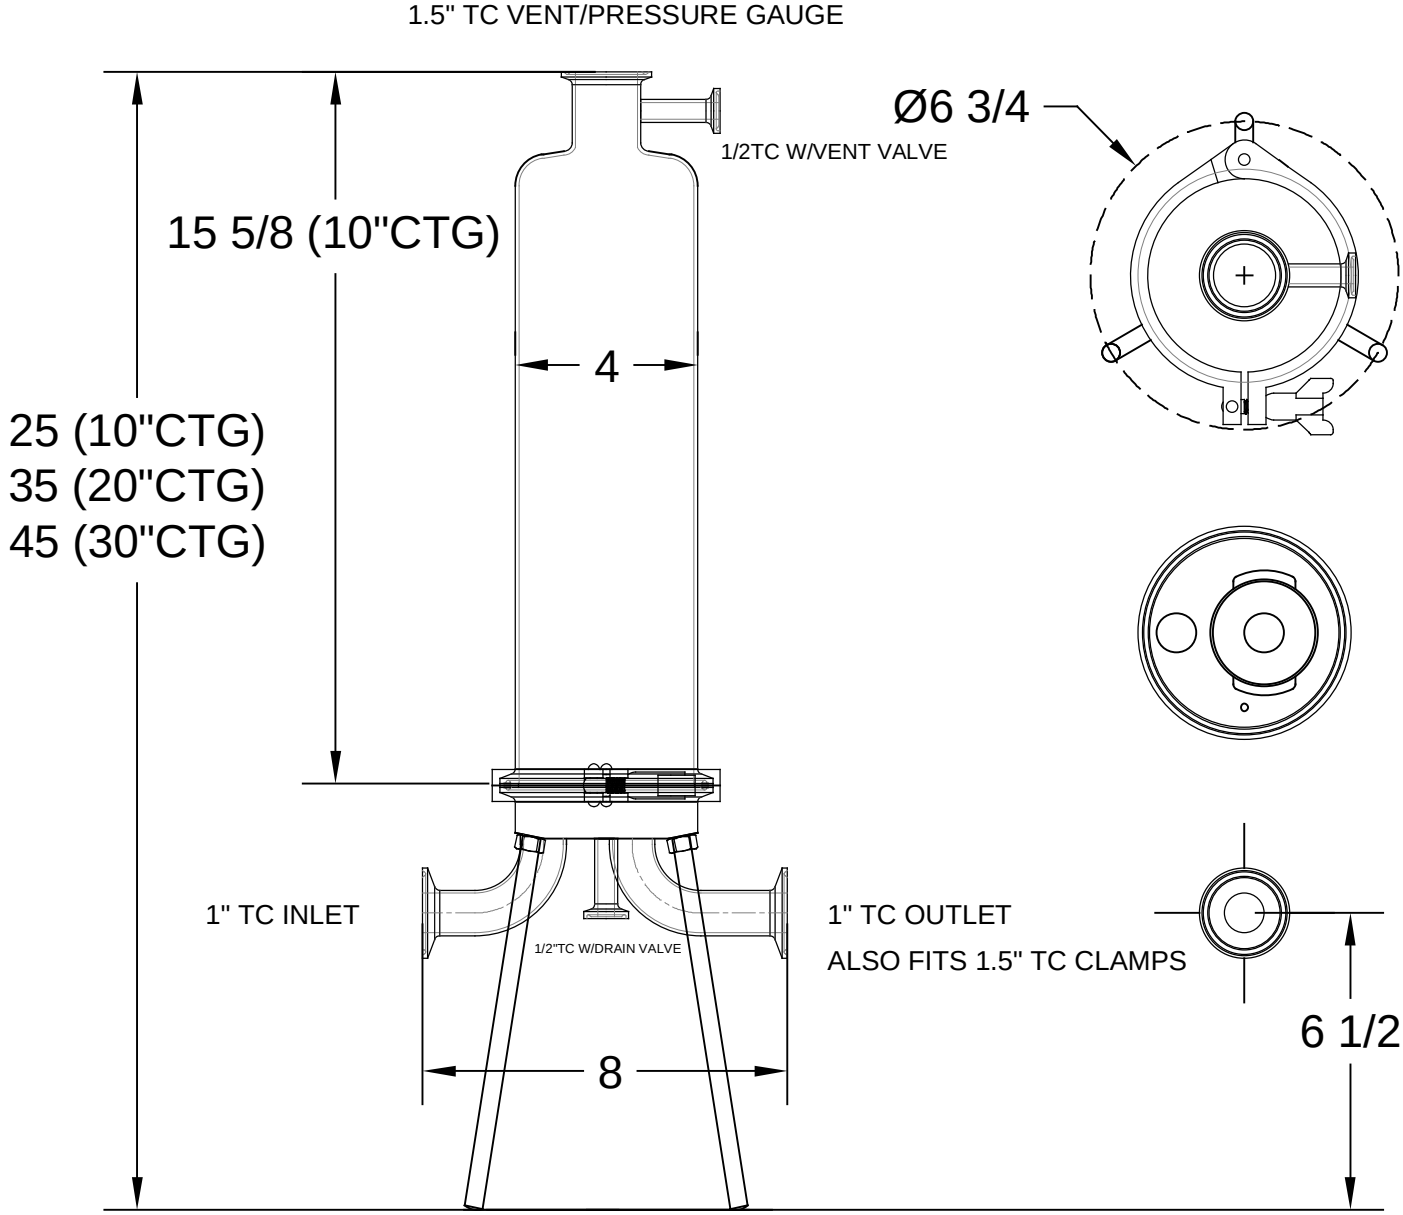

WEIGHT EMPTY 10" 12LBS, 20" 14LBS, 30"16LBS

THIS REPRODUCTION IS A PROPRIETARY DESIGN AND CONFIDENTIAL INFORMATION OF STRAINRITE INC. AND IS LOANED SUBJECT TO THE CONDITIONS THAT: (1) IT SHALL BE USED OR CAUSED TO BE USED FOR RECORD AND REFERENCE PURPOSES; (2) IT SHALL NOT BE USED OR CAUSED TO BE USED FOR PROCUREMENT IN ANY WAY PREJUDICIAL TO STRAINRITE INC. INTERESTS; (3) IT SHALL NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART; AND (4) IT SHALL NOT BE DISCLOSED AS GENERAL OR SPECIFIC INFORMATION WITHOUT EXPRESSED CONSENT IN WRITING SIGNED BY AN AUTHORIZED REPRESENTATIVE OF STRAINRITE INC.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE AS FOLLOW:
FRACTION ± 1/8 ANGLES ± 10°
.XX = ± .020 .XXX = ± XX

MATERIAL: 316L STAINLESS

SRVT-1RND-X0-1TC-C-C7

DRAWN BY: DCB
DATE : 4-23-15
APPROVAL:
DWG # : SRVT

CLARITY
65 First Flight Drive
Auburn Maine
(207) 777-3100

SCALE: XX | 0 | SHT. 1 OF 1 | C