
CARTRIDGE VESSEL
FILTER CARTRIDGE LIFE 0-20 PSID
MAXIMUM DIFFERENTIAL PRESSURE 25 PSID
FLOW RANGE 30" CTK 1-75 GPM , MAXIMUM FLOW RATE 100 GPM WATER

HOLDS (5) 226-FIN (C7)
DESIGN PRESSURE 100PSI @ 200F
NON-CODE MILD SERVICE
(PSV) PRESSURE SAFETY VALVE NOT SUPPLIED

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVAL
0	new	xx	xx

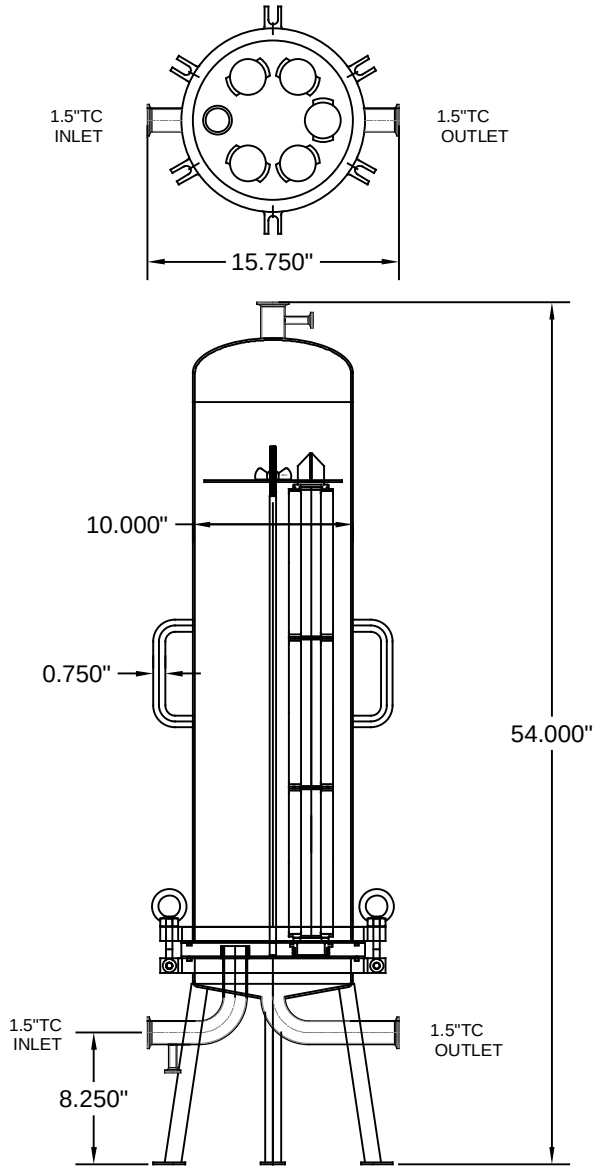

EST. SHIPPING WEIGHTS

30" 90 LBS

THIS REPRODUCTION IS A PROPRIETARY DESIGN AND CONFIDENTIAL INFORMATION OF UF STRAINRITE INC. AND IS LOANED SUBJECT TO THE CONDITIONS THAT: (1) IT SHALL BE USED OR CAUSED TO BE USED FOR RECORD AND REFERENCE PURPOSES; (2) IT SHALL NOT BE USED OR CAUSED TO BE USED FOR PROCUREMENT IN ANY WAY PREJUDICIAL TO UF STRAINRITE INC. INTERESTS; (3) IT SHALL NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART; AND (4) IT SHALL NOT BE DISCLOSED AS GENERAL OR SPECIFIC INFORMATION WITHOUT EXPRESSED CONSENT IN WRITING SIGNED BY AN AUTHORIZED REPRESENTATIVE OF UF STRAINRITE INC.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE AS FOLLOW:
FRACTION ± 1/8 ANGLES ± 10°
.XX = ± .020 .XXX = ± XX

MATERIAL: 316L SS

SRVT-5RND-30-1.5TC-C-C7

DRAWN BY: DCB
DATE: 8/11/20
APPROVAL:
DWG #: 353605
SCALE: xx | 0 | SHT. 1 OF 1 | C

STRAINRITE INC
65 First Flight Drive
Auburn Maine
(207) 777-3100