

# SRCT / SRVT

150 PSI / 100 PSI Sanitary 316L Stainless Steel Cartridge Vessels

## PRODUCT HIGHLIGHTS

### SRCT SINGLE CARTRIDGE

- Maximum Operating Pressure: 150 psi (67°F)
- Electropolished finish ensures optimal cleanability in critical areas
- Stainless steel legs
- Sterilization using in-line steam, autoclave or hot water
- Fitted for code 7 filter cartridge

### SRCT MULTI-CARTRIDGE

- Maximum Differential Pressure: 25 PSID
- Filter Cartridge Life: 0-25 PSID
- Electropolished finish ensures optimal cleanability in critical areas
- Stainless steel legs
- Sterilization using in-line steam, autoclave or hot water
- Fitted for code 7 and code 6 filter cartridges

### SRVT SINGLE & MULTI-CARTRIDGE

- Maximum Operating Pressure: 100 psi (200°F)
- 316 Stainless steel
- Removable cartridge plates for cleaning
- Bleeder valve vents and drains
- Silicone Gaskets

## PRODUCT DESCRIPTION

The [SRCT](#) and [SRVT](#) Sanitary Cartridge Vessels offer the aesthetics and operational durability of stainless steel at affordable prices. The SRCT's innovative design ensures optimal cleanability in critical areas and can accommodate either 10", 20" or 30" cartridges in a single cartridge housing and 20", 30" or 40" filter cartridges in a multi-cartridge vessel.

[SRCT](#) filters are designed specifically for liquid filtration in the food and beverage industry, offering microbiological safety, corrosion resistance and durability.

[SRVT](#) filters offer the same innovative design with a 100 PSI maximum operating pressure at 200°F.



SRCT  
Single Cartridge

SRCT SINGLE CARTRIDGE

Maximum Operating Pressure: 150 psi (67°F)  
Sterilization using in-line steam, autoclave or hot water  
Fitted for code 7 filter cartridge

SRCT MULTI-CARTRIDGE


Maximum Differential Pressure: 25 PSID  
Filter Cartridge Life: 0-25 PSID  
Sterilization using in-line steam, autoclave or hot water  
Fitted for code 7 and code 6 filter cartridges

SRVT SINGLE & MULTI-CARTRIDGE


Maximum Operating Pressure: 100 psi (200°F)  
316 Stainless steel  
Removable cartridge plates for cleaning  
Bleeder valve vents and drains  
Silicone Gaskets  
Holds 226/Fin (C7) Cartridges




SRCVT  
Multi-cartridge

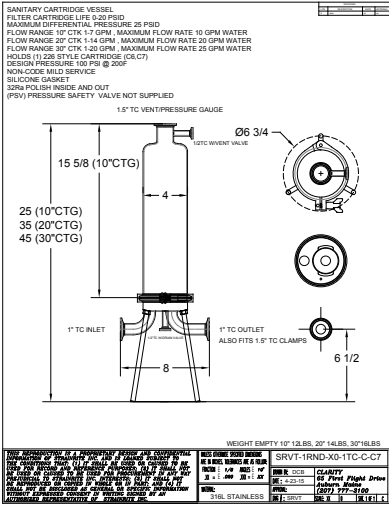

SRVT 1  
Single Cartridge

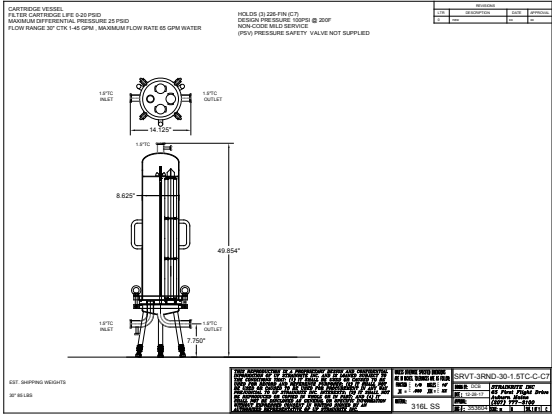

SRVT 3

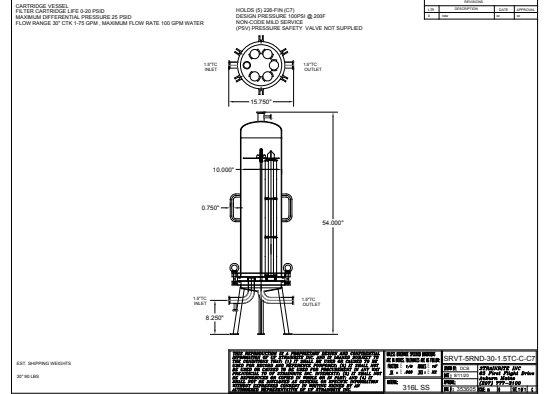

SRVT 5

We can build your vessel to suit your specifications.  
Call one of our customer service representatives for pricing and availability.

SPECIFICATIONS

V 1026

ORDER OPTIONS

| VESSEL                                              | SRCT<br>CARTRIDGE COUNT                                                                                                                               | SRVT<br>CARTRIDGE COUNT                                                            | CARTRIDGE<br>LENGTH                                           |                     | INLET/OUTLET                                                                             | MATERIAL              | END CAPS/O RING                   |
|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------|---------------------|------------------------------------------------------------------------------------------|-----------------------|-----------------------------------|
| SRCT Strainrite Sanitary Cartridge Vessel           | 1RND = 1-round cartridge<br>3RND = 3-round cartridges<br>5RND = 5-round cartridges                                                                    | 1RND = 1-round cartridge<br>3RND = 3-round cartridges<br>5RND = 5-round cartridges | SRCT                                                          | SRVT                | SRCT<br>1TC 1" Tri-Clover*<br>2TC 2" Tri-Clover<br>3TC 3" Tri-Clover                     | C 316 Stainless Steel | SRCT<br>C6 Flat/226<br>C7 Fin/226 |
| SRVT Strainrite Sanitary Cartridge Vessel - 100 psi | 8RND = 8-round cartridges<br>12RND = 12-round cartridges<br>18RND = 18-round cartridges<br>24RND = 24-round cartridges<br>30RND = 30-round cartridges | 7RND = 7-round cartridges<br>12RND = 12-round cartridges                           | 20"<br>30"<br>**40"                                           | *10"<br>*20"<br>30" | SRVT<br>1TC 1.5" Tri-Clover*<br>1.5TC 1.5" Tri-Clover***<br>2TC 2" Tri-Clover***         |                       | SRVT<br>C7 Fin/226                |
|                                                     |                                                                                                                                                       |                                                                                    | * 1-cartridge house only<br>** Not available with 1-cartridge |                     | * 1-cartridge house only<br>** 3.5,7-cartridge house only<br>*** 12-cartridge house only |                       |                                   |

SRCT

Series

→

1RND

Cartridge Count

→

10

Cartridge Length

→

1

Inlet/Outlet

→

C

Material

→

C6

END CAP

→

SRCT1RND201CC6